


Standox EP Primer Surfacer U7300

Standox EP Primer Surfacer U7300 is an epoxy-based, universal, zinc chromate-free primer surfacer that provides good corrosion protection and adhesion for steel and galvanised substrates.



- Allows for easy application.
- Suitable for use as a wet-on-wet and sanding surfacer.
- Good insulation effect.
- Suitable for IR drying.
- Good storage durability.
- Universal epoxy-based primer surfacer.
- Mix 5:1 with EP Hardener U7310.
- Classic epoxy-resin-based primer surfacer with very good technical properties.

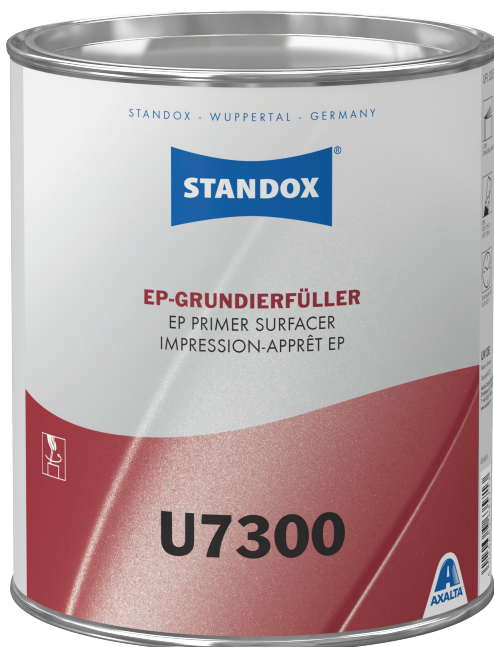


The Art of Refinishing.

Stadox EP Primer Surfacer U7300

Product preparation - application STANDARD SANDING



It is strongly recommended to use appropriate personal protection equipment during application to avoid respiratory, skin and eye irritation.



Bare steel sanded and cleaned
Galvanised steel or aluminium sanded and cleaned
Old or original paintwork well sanded and cleaned.
OEM Primer (e-coat), finely sanded or unsanded and thoroughly cleaned. Remark: due to the wide variety of electrocoats present on the market, its quality can differ a lot. For this reason preferably scuff sand the e-coat
Surfaces pretreated with 2K polyester products and then finely sanded and cleaned.
Glass fibre polyester substrates, free of release agents, sanded and cleaned.



Primer surfacer		Hardener		Thinner			
Volume	Weight	Volume	Weight	Volume	Weight	Volume	Weight
5	100	1	11	25%	16	20%	13
U7300		U7310		VOC T		2K 10-20	
				15-30		2K 15-25	
				VOC T		2K 20-25	
				30-40		2K 25-35	
						2K 35-40	



Potlife at 20°C: 6 hr



	Spray nozzle	Spray pressure	
Compliant	1.3 - 1.6	1.5 - 2 bar	inlet pressure
HVLP	1.3 - 1.6	0.7 bar	atomisation pressure

see manufacturer's instructions



2 - 3 coats with intermediate flash-off: 5 min - 10 min
before bake: 5 min - 10 min



	U7310 / VOC T / 2K Thinner
20 °C	12 hr - 16 hr
60 - 65 °C	30 min - 40 min



Guideline for short wave IR equipment
Half power: 3 - 5 min
Full power: 12 - 15 min



P400 - P600



2K Topcoat
Standohyd Plus Basecoat / Standohyd Plus Transformer 8100
Stadox Basecoat + Clearcoat
Polyester products

VOC compliant


2004/42/IIB(c)(540) 540: The EU limit value for this product (product category: IIB(c)) in ready to use form is maximum 540 g/l of VOC. The VOC content of this product in ready to use form is maximum 540 g/l.

Stadox EP Primer Surfacer U7300

Product preparation - application STANDARD WET-ON-WET



It is strongly recommended to use appropriate personal protection equipment during application to avoid respiratory, skin and eye irritation.



Bare steel sanded and cleaned
 Galvanised steel or aluminium sanded and cleaned
 Old or original paintwork well sanded and cleaned.
 OEM Primer (e-coat), finely sanded or unsanded and thoroughly cleaned. Remark: due to the wide variety of electrocoats present on the market, its quality can differ a lot. For this reason preferably scuff sand the e-coat
 Surfaces pretreated with 2K polyester products and then finely sanded and cleaned.
 Glass fibre reinforced polyester substrates, free of release agents sanded.



Primer surfacer		Hardener		Thinner			
Volume	Weight	Volume	Weight	Volume	Weight	Volume	Weight
5	100	1	11	25%	16	20%	13
U7300		U7310		VOC T 15-30 VOC T 30-40		2K 10-20 2K 15-25 2K 20-25 2K 25-35 2K 35-40	



Potlife at 20°C: 6 hr



	Spray nozzle	Spray pressure	
Compliant	1.3 - 1.6	1.5 - 2 bar	inlet pressure
HVLP	1.3 - 1.6	0.7 bar	air cap pressure

see manufacturer's instructions



Primer		Primer-surfacer	
1 coat	final flash-off: 30 min - 2 hr	1 - 2 coats	with intermediate flash-off: 5 min - 10 min final flash-off: 1 hr - 2 hr



Primer	Primer-surfacer
2K Filler	2K Topcoat Standohyd Plus Basecoat / Standohyd Plus Transformer 8100 Stadox Basecoat + Clearcoat

VOC compliant

2004/42/IIB(C)540: 540: The EU limit value for this product (product category: IIB(C)) in ready to use form is maximum 540 g/l of VOC. The VOC content of this product in ready to use form is maximum 540 g/l.

Stadox EP Primer Surfacer U7300

Products

Stadox EP Primer Surfacer U7300

Stadox EP Hardener U7310

Stadox Thinner VOC 15-30

Stadox Thinner VOC 30-40

Stadox Thinner 2K 10-20

Stadox Thinner 2K 15-25


Stadox Thinner 2K 20-25

Stadox Thinner 2K 25-35


Stadox Thinner 2K 35-40

Product mix


Mixing ratios with special agents are available in the productmix table on Standowin IQ and in the specific TDS.



DIN 4: 16 - 19 s at 20°C



60 - 110 µm sanding
20 - 30 µm non-sanding



Theoretical coverage

375 - 390 m²/l at 1 micron dry film thickness

Due to different hardener characteristics and different mixing ratios of the ready-to-use mixture in some TDS versions, the theoretical coverage calculation may vary.

Note: The practical material consumption depends on several factors, e.g. geometry of the object, surface formation, application method, spray gun setting, inlet pressure, etc.

Clean after use with a suitable solventbased guncleaner.



Standex EP Primer Surfacer U7300

Remarks

- Material has to be at room temperature (18-25°C) before use.
 - Allow additional time for preheating up to panel temperature.
 - Surplus ready for use material should not be returned to original can.
 - Can not be applied over acid containing primers.
 - Polyester putties can be applied over cured and sanded epoxy primer-surfacers.
 - Mix thoroughly by hand before placing the can on mixing machine.
 - With regard to elastifying properties, the use of Standox Plasticiser is not allowed.
-

Consult Safety Data Sheet prior to use. Observe the precautionary notices displayed on the container.

All other products referred to in the refinish build up are from our Standox product range. System properties will not be valid when the related material is used in combination with any other materials or additives which are not part of our Standox product range, unless explicitly indicated otherwise.

For professional use only! The information provided in this documentation has been carefully selected and arranged by us. It is based upon our best knowledge on the subject at the date of issuance. The Information is given for information purposes only. We are not liable for its correctness, accuracy and completeness. It is up to the user to check the information with regard to up-to-dateness and suitability for his intended purpose. The intellectual property in this Information, including patents, trademarks and copyrights, is protected. All rights reserved. The relevant Material Safety Data Sheet and Warnings displayed on the product label need to be observed. We may modify and/ or discontinue operation of all or portions of this Information at any time in our sole discretion, without notice and assume no responsibility to update the Information. All rules set forth in this clause shall apply accordingly for any future changes and amendments.

